


Rider-M

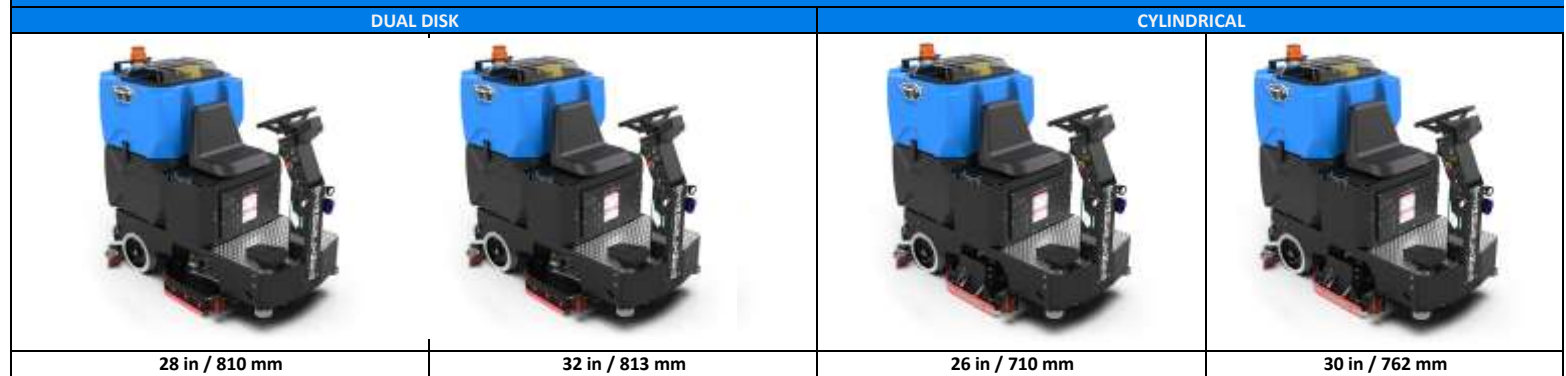

Tank Material:	Poly 5/16" (7.9mm)			
Chassis Construction:	3/16" Steel (4.8mm) Powder Coated Steel			
Front Wheels (Diameter x Width):	10" x 3" (25 x 7cm) - Non-Marking Grey			
Rear Casters (Diameter x Width):	12 x 3" (6.4 x 3.5cm) - Non-Marking Grey			
Length x Width x Height	60 x 29 x 56 in *			
<small>*Dimensions listed are for the largest width deck configuration and squeegees removed from the machine</small>	152 x 74 x 142 cm*			
Scrub Motor(s):	(2x) 0.75 hp / 559 watts			
Brush RPM:	270 rpm			
System Voltage:	24 VDC			
Standard Battery:	240ah WET			
Battery Run Time:*	Up to 4 Hours			
Charger:	Onboard CE & CEC 27A			
Traction Drive System:	0.75hp - All Gear / Sealed (559 watts)			
Solution Tank Capacity:	40 gal / 151 L			
Solution Flow / Filter:	0 - 0.6 GPM / Stainless Inline (0 - 2.3 LPM)			
Recovery Tank Capacity:	42 gal / 159 L			
Vacuum Motor:	0.8 hp / 24V / 3 Stage / 640 watts			
Vacuum Water Lift:	70" / 178 cm / 70 cfm			
Squeegee:	37 in (94 cm)	41 in (104 cm)	37 in (94 cm)	41 in (104 cm)
Sound Levels:**	66 dBA**			
Productivity - Theoretical:***	38,500 ft2/hr 3,576 m2/hr	44,000 ft2/hr 4087 m2/hr	35,750 ft2/hr 3,321 m2/hr	41,250 ft2/hr 3,832 m2/hr
Productivity - Practical:***	18,000 ft2/hr 1,672 m2/hr	20,500 ft2/hr 1,904 m2/hr	16,000 ft2/hr 1,579 m2/hr	19,500 ft2/hr 1,811 m2/hr

Location:
 Timberline Cleaning Equipment
 1711 South Street
 Racine, WI
 53404

Phone:
 877-401-0730

Email:
customerservice@timberlineclean.com
Website:
www.timberlineclean.com

Specifications subject to change without notice.
 *Battery Run Times are based on continuous scrubbing run times, standard batteries, low down pressure and all options off.

**Decibel levels for Disk per ISO 11201 as recommended by the American Association of Cleaning Equipment Manufacturers & OSHA

***Productivity is based off of ISSA 2010 Cleaning Times